

DUMPS ARENA

Brocade Certified Fabric Professional Gen 5

Brocade 143-085

Version Demo

Total Demo Questions: 10

Total Premium Questions: 91

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

Topic Break Down

Topic	No. of Questions
Topic 1, Product Features	13
Topic 2, Implementation and Configuration	12
Topic 3, SAN Management	8
Topic 4, Adaptive Networking and Fabric Vision	10
Topic 5, FC-FC Routing	16
Topic 6, Extension Features and Implementation	14
Topic 7, Advanced Troubleshooting	18
Total	91

QUESTION NO: 1


You want to implement trunking. You are using in-flight encryption on a Brocade 6510 switch using 16 Gbps SFPs in your fabric.

What is the maximum number of ports per trunk that is supported?

- A. 2
- B. 4
- C. 8
- D. 16

ANSWER: A**QUESTION NO: 2**

Refer to the exhibit.

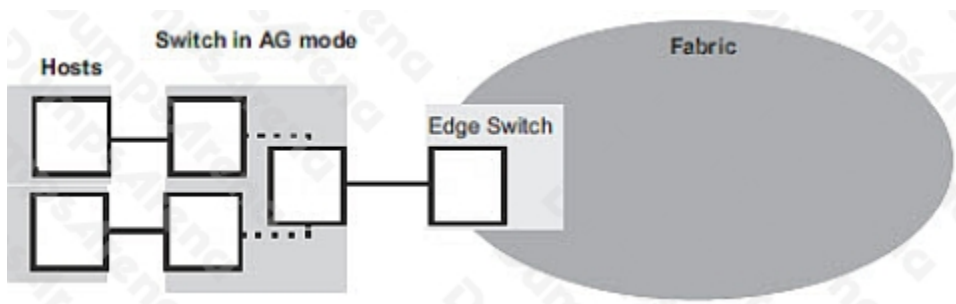

In the exhibit, which two port types are used? (Choose two.)

- A. E
- B. N
- C. F
- D. EX

ANSWER: B C**QUESTION NO: 3**

You are deploying Brocade switches in Access Gateway mode in your environment. Each Access Gateway must provide access to both a Brocade fabric and a third-party fabric. Maximum resiliency and redundancy are required for the connections into each fabric. Individual servers will be connected to one or the other fabric, but never both.


What are three ways to configure the Access Gateway? (Choose three.)

- A. Use N_Port trunking on the Brocade fabric uplinks
- B. Use N_Port trunking on the third-party fabric
- C. Use port groups to restrict fabric access
- D. Use port mappings to restrict fabric access
- E. Use different domain IDs for the uplink ports

ANSWER: A C D

QUESTION NO: 4

Refer to the exhibit.

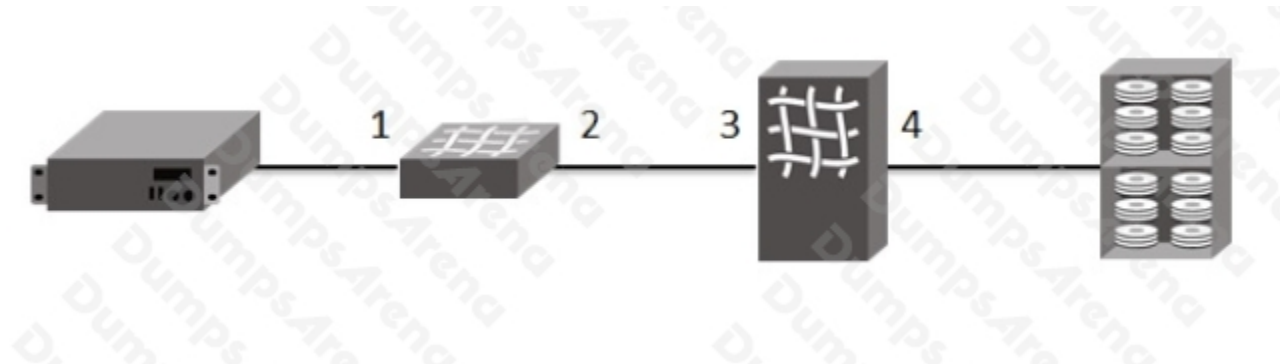

You need to enable Flow Mirror for a specific frame type between an initiator and a target.

Referring to the exhibit, where would you insert the Flow Mirror?

- A. 1
- B. 2
- C. 3
- D. 4

ANSWER: D

QUESTION NO: 5

You are using FC routing to allow a host in the edge fabric FID 10 to communicate with a target in the edge fabric FID 20. The backbone FID is 100. The host is unable to communicate with the target.

```
BB_51:admin> fcrphydevshow
Device           WWN           Physical
Exists          in Fabric
-----
 20             22:00:00:20:37:dd:d9:29  010100
```

Which statement is true?

- A. The host is offline.
- B. The target is offline.
- C. LSAN zones have not been configured on the edge fabric FID 30.
- D. LSAN zones have not been configured on the backbone fabric.

ANSWER: A

QUESTION NO: 6

You need to implement FC routing in your Gen 5 fabric. The backbone fabric will contain a factory default Brocade 7800 Extension Switch and a Brocade DCX 8510-8 with two FC16-32 blades. VEX_Port connectivity to the edge fabrics will be needed in the final configuration.

Which two statements describe how to enable the final configuration? (Choose two.)

- A. An Integrated Routing license must be installed on the Brocade 7800 Extension Switch.
- B. LSAN zones must be configured in the backbone.
- C. VEX_Ports must be configured on the Brocade DCX 8510-8.
- D. VEX_Ports must be configured on the Brocade 7800 Extension Switch.

ANSWER: A D

QUESTION NO: 7

You decide to implement F_Port trunking in your Gen 5 fabric.

Which two statements are true? (Choose two.)

- A. You can configure F_Port trunking between F_Ports on a Fabric OS switch and N_Ports on an Access Gateway.

- B. You can configure F_Port trunking on the F_Ports of an Access Gateway.
- C. You can configure F_Port trunking between F_Ports on a Fabric OS switch and N_Ports on a Brocade adapter.
- D. You can configure F_Ports to be E_ports with F_Port trunking on a Fabric OS switch.

ANSWER: A C

QUESTION NO: 8

You are monitoring a flow using MAPS in Brocade Network Advisor.

```

SWS510-8-100:FID128:admin> flow --show
-----
Flow Name | Feature | SrcDev | DestDev | IngrPt|EgrPt | BiDir| LUN | FrameType|
-----
flow1     | mir+   | *      | *        | 1-    |1/25 | no   | -   | -         |
flow2     | mon+   | *      | *        | 1/25  | -    | no   | -   | -         |
flow3     | mon+   | 808b40 | 030100   | 1/27  | -    | yes  | -   | -         |
flow4     | mir+   | 801b40 | 030100   | 2/12  | 1/25 | no   | -   | -         |
-----
+ Denotes feature is currently activated for the flow

```

Referring to the exhibit, which two flows would be imported into MAPS? (Choose two.)

- A. flow1
- B. flow2
- C. flow3
- D. flow4

ANSWER: C D

QUESTION NO: 9

Which feature is used when connecting a Brocade 6510 in Access Gateway mode to different fabrics while maintaining device-to-fabric consistency?

- A. Advanced Device Security
- B. port grouping
- C. failover
- D. port mapping

ANSWER: B

QUESTION NO: 10

In an FC-FC routed fabric, to which fabric element are proxy devices logically connected?

- A. base switch
- B. translate domain
- C. logical switch FID 128
- D. front domain

ANSWER: B