

DUMPS ARENA

Associate - Networking Exam

EMC DEA-5TT1

Version Demo

Total Demo Questions: 10

Total Premium Questions: 61

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

Which type of domains are connected by a Layer 2 switch?

- A. Single collision domain and a single broadcast domain
- B. Multiple broadcast domains and multiple collision domains
- C. Multiple collision domains and a single broadcast domain
- D. Single collision domain and multiple broadcast domains

ANSWER: C**QUESTION NO: 2**

Which IPv4 address is in the same network as the IP address 182.15.24.40/23 and assignable to a host device?

- A. 182.15.23.224
- B. 182.15.25.0
- C. 182.15.25.255
- D. 182.15.26.10

ANSWER: B**QUESTION NO: 3**

Which IP address is in the Class B range?

- A. 100.100.90.87
- B. 126.16.20.48
- C. 191.56.44.200
- D. 192.15.48.130

ANSWER: C

QUESTION NO: 4

On which Dell EMC Networking switches can Multi-Chassis Link Aggregation (MLAG) be configured?

- A. C9000 Series
- B. N-Series
- C. S-Series
- D. Z-Series

ANSWER: B**QUESTION NO: 5 - (DRAG DROP)**


DRAG DROP

What is the correct sequence of steps that occur in the communications between the client and server to obtain an IP address from a DHCP server?

Select and Place:

DHCP client sends a DHCPREQUEST message to accept the IP address	Step 1
DHCP client sends a DHCPDISCOVER message to request an IP address	Step 2
A DHCPACK message is sent by the DHCP server to the DHCP client to acknowledge that the client has accepted the offered IP address	Step 3
DHCP server receives the DHCPDISCOVER message	Step 4
DHCP server offers an available IP address by sending a DHCPPOFFER message to the DHCP client	Step 5

ANSWER:

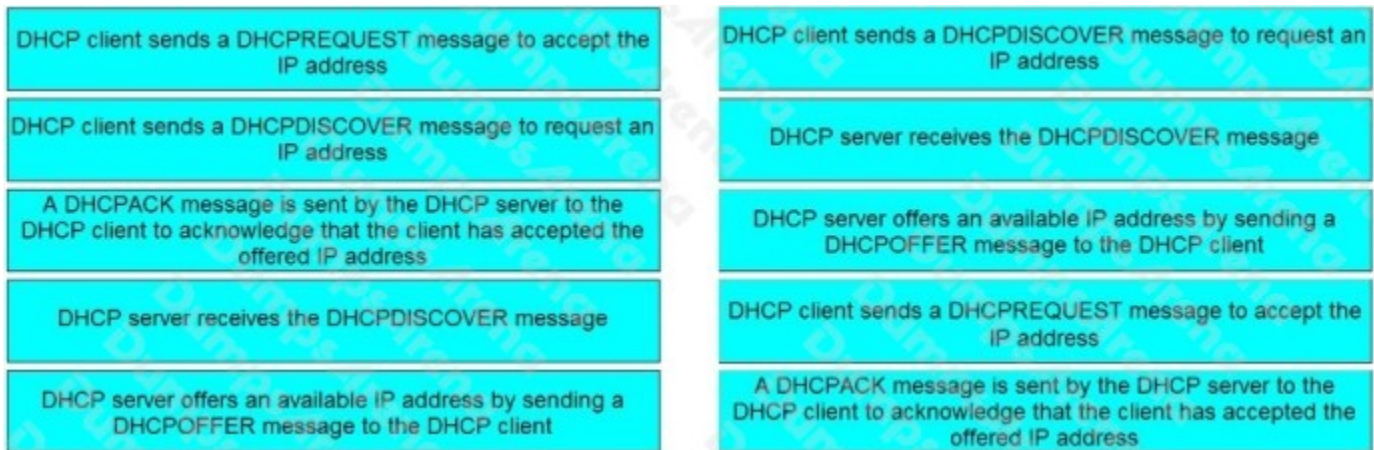

Explanation:

QUESTION NO: 6

An Ethernet switch receives a frame from a directly connected host. The source MAC address of the frame is not present in the MAC address table for the switch. However, the destination address is present in the MAC address table.

What does the switch do with the frame?

- A. Flushes the destination MAC address and updates the MAC address table in the switch.
- B. Adds the source MAC address and port to the MAC address table and forwards the frame.
- C. Discards the frame on all ports and sends an error message back to the host.
- D. Floods the frame to all ports except for the port the frame originated from to locate the source MAC address.

ANSWER: B

QUESTION NO: 7

What accurately describes OSPF?

- A. Interior gateway link-state protocol
- B. Exterior gateway distance-vector protocol
- C. Interior gateway distance-vector protocol
- D. Interior gateway path-vector protocol

ANSWER: A

QUESTION NO: 8

What is the Organizationally Unique Identifier (OUI) in the MAC address 00:C4:4F:23:AF:4A?

- A. 00:C4:4F
- B. 00:C4:4F:23
- C. 23:AF:4A
- D. 4F:23:AF:4A

ANSWER: A**QUESTION NO: 9**

Which port type should be used for only VLAN-unaware devices?

- A. Access port
- B. General port
- C. Hybrid port
- D. Trunk port

ANSWER: C**QUESTION NO: 10**

Which port and protocol is used by NTP to communicate?

- A. TCP port 123 for both the source and destination
- B. TCP port 123 for the source and TCP port 80 for the destination
- C. UDP port 123 for both the source and destination
- D. UDP port 123 for the source and TCP port 80 for the destination

ANSWER: C