

DUMPS ARENA

**Specialist - Implementation Engineer,
PowerMax and VMAX Family Solutions**

EMC DES-1121

Version Demo

Total Demo Questions: 10

Total Premium Questions: 69

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

**sales@dumpsarena.co
dumpsarena.co**

QUESTION NO: 1

When using TimeFinder SnapVX, what is the maximum number of linked targets allowed per source?

- A. 128
- B. 256
- C. 512
- D. 1024

ANSWER: D**QUESTION NO: 2**

Which command is used to change the CPU resource distribution for SRDF modes?

- A. symqos
- B. symconfigure
- C. symrdf
- D. symcfg


ANSWER: A**QUESTION NO: 3 - (DRAG DROP)**

An RDF group on a VMAX3 array is being replicated in SRDF/A mode to a remote VMAX3 array. To accommodate application growth, a new R1 device needs to be added to the RDF group. SRDF/A consistency of the existing devices in the RDF group should be maintained when the new device is added.

What is the correct sequence of steps for adding the new R1 device and making it available for application use?

Suspend the links for the new RDF device pair	STEP 1
Wait until the Consistency Exempt attribute is cleared and the pair state is Consistent	STEP 2
Create a new RDF device pair in a temporary RDF group and wait for the pair state to become Synchronized	STEP 3
Move the new RDF device pair to the RDF/A group using Consistency Exempt	STEP 4
Resume the links for the new RDF device pair	STEP 5

ANSWER:

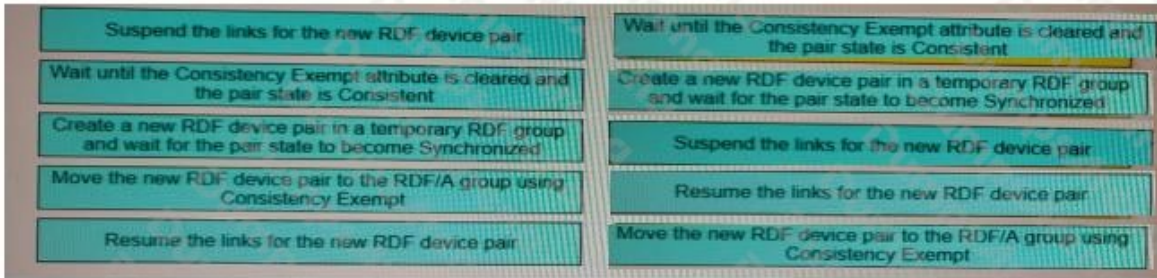

QUESTION NO: 4

What are the Compliance levels for Storage Groups in Unisphere for PowerMax?

- A. Critical, Marginal, Warning, and No Status
- B. Fatal Critical Warning, and No Status
- C. Fatal, Critical, Stable, and No Status
- D. Critical, Marginal, Stable, and No Status

ANSWER: D

QUESTION NO: 5

Which units of measure are used to specify the size type when creating volumes in Unisphere?

- A. Cylinders, MB, GB, TB
- B. MB and GB only
- C. MB, TB, PB
- D. Cylinders, GB, TB, PB

ANSWER: D

QUESTION NO: 6

Which Unisphere for PowerMax client connection authentication type is irrevocable once it is selected?

- A. LDAP - SSL

- B. Multi-factor Authentication
- C. x.509 Common/Principal Name
- D. Windows AD Domain-based

ANSWER: D

QUESTION NO: 7

Two PowerMax arrays have been configured for replication using SRDF. During a disaster recovery operation, production has been transferred to the R2 devices at the target site. Which operation begins the transfer of accumulated invalid tracks from the R2s to the R1s while production work continues on the R2s?

- A. Update
- B. Fallback
- C. Resume
- D. Failover

ANSWER: C

QUESTION NO: 8

Which product(s) support(s) only 7+1 in RAID 5 configurations?

- A. VMAX3
- B. VMAX All Flash and PowerMax 8000
- C. VMAX All Flash and PowerMax 2000
- D. VMAX All Flash

ANSWER: D

QUESTION NO: 9

How does Unisphere 360 differ from Unisphere for PowerMax?

- A. Unisphere for PowerMax is the management console for PowerMax and VMAX Family arrays. Unisphere 360 provides centralized monitoring for DMX, VMAX Family, and PowerMax arrays.
- B. Unisphere for PowerMax provides both GUI and SYMCLI access to PowerMax and VMAX arrays. Unisphere 360 provides only GUI access to PowerMax and VMAX arrays.

C. Unisphere for PowerMax provides centralized monitoring for DMX, VMAX Family, and PowerMax arrays Unisphere 360 is the management console for PowerMax and VMAX Family arrays

D. Unisphere for PowerMax provides only GUI access to PowerMax and VMAX arrays. Unisphere 360 provides both GUI and SYMCLI access to PowerMax and VMAX arrays.

ANSWER: C

QUESTION NO: 10

What does a service level define*?

- A.** Expected average throughput for a Storage Group
- B.** Expected average response time target for a Storage Group
- C.** Expected average response time target for a disk group
- D.** Expected average throughput for a disk group

ANSWER: B