

DUMPS ARENA

Design-Associate (JNCDA)

Juniper JN0-1101

Version Demo

Total Demo Questions: 10

Total Premium Questions: 65

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

Your campus network is rolling out a BYOD policy. Your design must ensure that guest users are restricted from accessing internal network resources.

Which two actions would solve this problem? (Choose two.)

- A. Guest users should be placed in an isolated guest routing instance.
- B. Guest users should be placed in an isolated guest VLAN.
- C. Guest users should be placed in a non-isolated guest routing instance.
- D. Guest users should be placed in a non-isolated guest VLAN.

ANSWER: A B

QUESTION NO: 2

What does the network MTTR measure?

- A. the length of time it takes to design the network
- B. the length of time to build the network
- C. the length of time to repair the network
- D. the length of time it takes to reboot the network devices

ANSWER: C

QUESTION NO: 3

In a network design using the traditional tiered structure, which two tiers connect to untrusted domains? (Choose two.)

- A. access
- B. WAN edge
- C. core
- D. aggregation

ANSWER: B D

QUESTION NO: 4

What are three types of automation scripts used on a Junos device? (Choose three.)

- A. op scripts
- B. commit scripts
- C. boot scripts
- D. event scripts
- E. control scripts

ANSWER: A B D

QUESTION NO: 5

What are two main elements of a network design RFP? (Choose two.)

- A. business requirements
- B. staffing requirements
- C. e-waste requirements
- D. environmental requirements

ANSWER: A D

QUESTION NO: 6

You are asked to provide a design proposal for a service provider network. The design must ensure that customers are able to send Layer 2 traffic between sites.

In this scenario, which VPN technology would be used to accomplish this task?

- A. IPsec VPN
- B. Layer 3 VPN
- C. GRE

D. EVPN

ANSWER: D

QUESTION NO: 7


What should be included in a network design to improve resiliency?

- A. climate control systems
- B. redundant power supplies
- C. out-of-band management
- D. in-band management

ANSWER: B

QUESTION NO: 8

Click the Exhibit button.

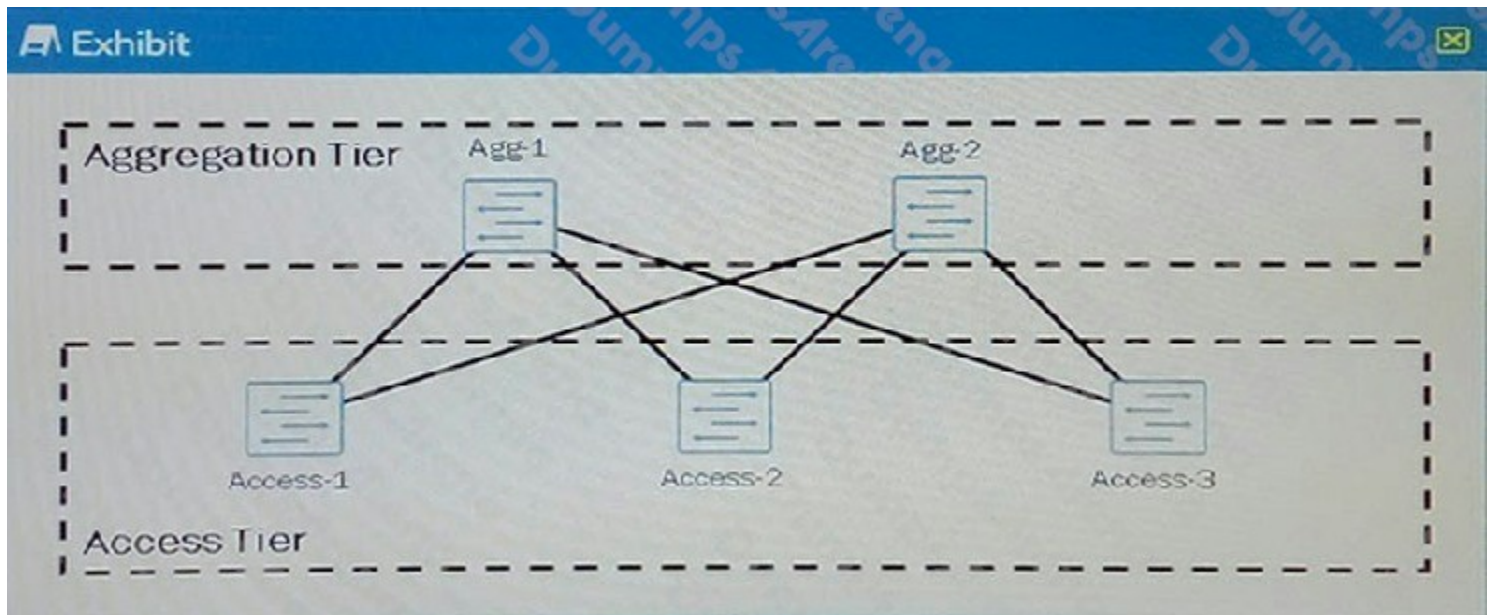

Referring to the exhibit, you are designing a Layer 2 data center and you want to make sure that all the links between the access tier and the aggregation tier are used.

What should you do to accomplish this task?

- A. Use VRRP on Agg-1 and Agg-2.
- B. Place Agg-1 and Agg-2 in a Virtual Chassis.
- C. Use RSTP on all devices.
- D. Use BGP load balancing on all devices.

ANSWER: B

QUESTION NO: 9

You are designing a WAN implementation to securely connect two remote sites to the corporate office. A public Internet connection will be used for the connections.

Which statement is true in this situation?

- A. The connection should be secured using IPsec.
- B. The WAN edge devices must support MPLS.
- C. The connections support Layer 2 traffic bridging.
- D. The service provider can isolate traffic in a private MPLS instance.

ANSWER: A

QUESTION NO: 10

Which two statements are true regarding a Virtual Chassis? (Choose two.)

- A. A Virtual Chassis must be configured on the same series but not the same model.
- B. A Virtual Chassis supports up to 10 participating devices.
- C. A Virtual Chassis supports only two participating devices.
- D. A Virtual Chassis can be configured on mixed series and models.

ANSWER: B D