

DUMPS ARENA

NetApp Certified Implementation Engineer-E-Series

Netapp NS0-515

Version Demo

Total Demo Questions: 10

Total Premium Questions: 60

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

An orphaned volume occurs during an asynchronous mirror implementation. You must recover the orphaned volume.

In this scenario, which statement is correct?

- A. Remove the mirroring relationship on the orphan, then re-create the mirroring relationship
- B. Suspend mirroring operations on the orphan, then resume operations
- C. Deactivate the mirror consistency group that contains the orphan, then re-enable the group
- D. Perform a role change on the orphan, then re-create the mirroring relationship

ANSWER: A**Explanation:**

Reference: https://library.netapp.com/ecm/ecm_download_file/ECMP1394847

QUESTION NO: 2

What is represented by the Headroom graph on the SANtricity System Manager performance tab?

- A. the percentage of I/O associated with the backend disk drives
- B. the remaining performance capability of the physical objects in the storage system
- C. the percentage of CPU processing capacity that is being used by the operations on the system
- D. the resources that are being consumed by a defined workload

ANSWER: B**Explanation:**

Reference: https://mysupport.netapp.com/NOW/public/eseries/sam_archive1130/GUID-8538272A-B802-49D9-9EA2-96C82DAD26A2/GUID-8538272A-B802-49D9-9EA2-96C82DAD26A2_2.pdf (379)

QUESTION NO: 3

Which two errors would fail a pre-upgrade health check? (Choose two.)

- A. Hot spares are in use
- B. Volumes are reported on a non-preferred path

- C. An excess number of event log events are present
- D. I/O is being processed

ANSWER: A C

Explanation:

Reference: [https://kb.netapp.com/app/answers/answer_view/a_id/1029754/~how-to-upgrade-e-series-controller-firmware%2C-nvsram%2C-and-iom-firmware-using](https://kb.netapp.com/app/answers/answer_view/a_id/1029754/~/how-to-upgrade-e-series-controller-firmware%2C-nvsram%2C-and-iom-firmware-using)

QUESTION NO: 4

What are two methods for setting the host protocol configuration on the E2800 controller with a 4-port 16Gbps FC or 10Gbps iSCSI SFP+ host interface card (HIC)? (Choose two.)

- A. Set at the factory, based on the order
- B. Change the QSFP type in the HIC
- C. Change the Feature Pack in the SANtricity System Manager
- D. Set in the Hardware tab using SANtricity System Manager

ANSWER: C D

Explanation:

Reference: <https://docs.netapp.com/ess-11/index.jsp?topic=%2Fcom.netapp.doc.e-2800-sysmaint%2FGUID-C2A2AAC4-A1B9-468F-8CE8-862D32917840.html>

QUESTION NO: 5

A customer needs to add an EF280 with FC into its existing Brocade fabric but the FC ports in the SANtricity System Manager are showing the FC ports as down and the LED on the FC HIC is amber.

Which three tasks does the installer need to complete to solve this problem? (Choose three.)

- A. Verify that the ports are enabled on the switch
- B. Verify that the cables are plugged into the switch
- C. Verify that the server HBA has the boot BIOS enabled
- D. Verify that the EF280s management port is up
- E. Verify that the switch zone has the WWPNs for the EF280 and Server HBAs

ANSWER: A B E**QUESTION NO: 6**

Click the Exhibit button.




Referring to the exhibit, which cable is an InfiniBand 4X connector?

- A. 3
- B. 1
- C. 2
- D. 4

ANSWER: C**Explanation:**Reference: http://www.admin-sys.org/IMG/pdf/Hardware_Universe.pdf**QUESTION NO: 7**

Click the Exhibit button.

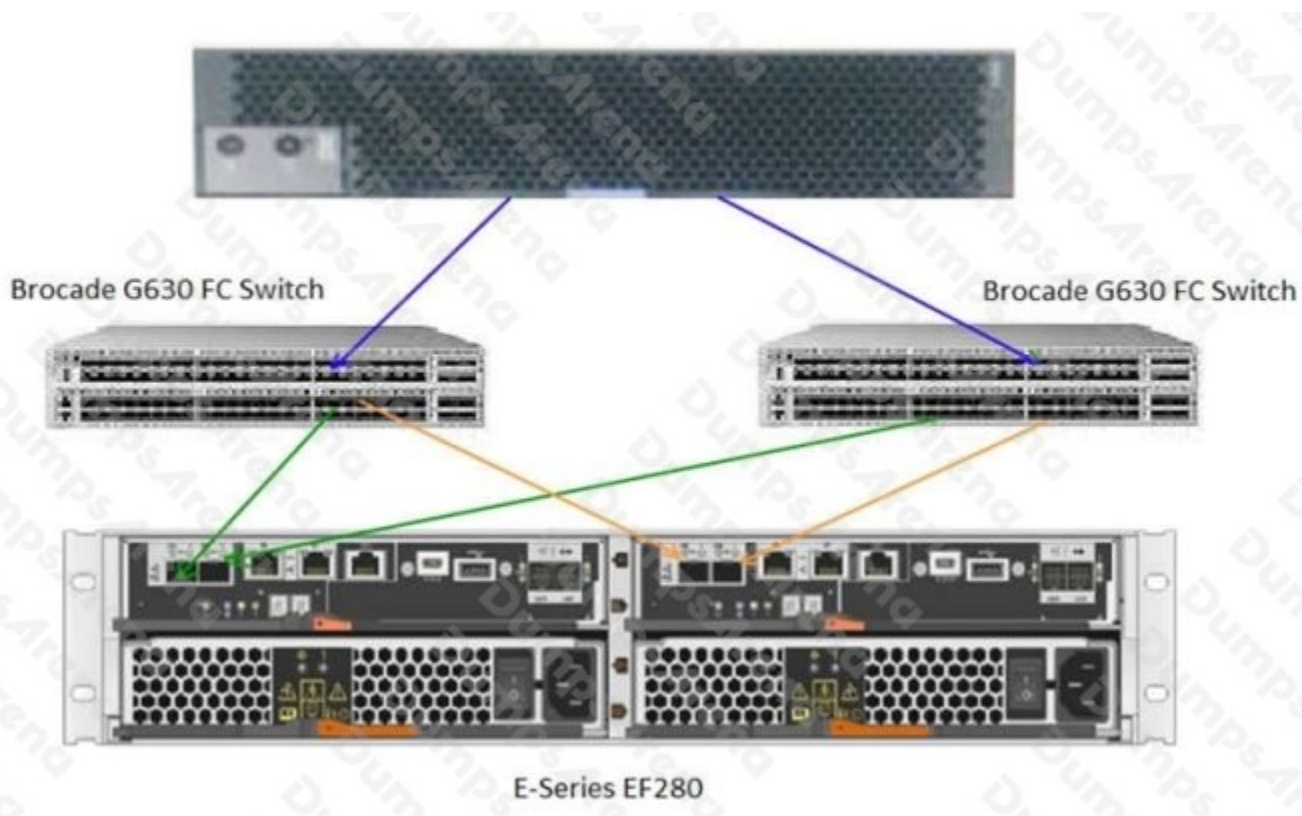

Referring to the exhibit, what is the total number of ALUA paths from the host to a volume on the EF280?

- A. 8
- B. 6
- C. 2
- D. 4

ANSWER: D

Explanation:

Reference: <https://www.netapp.com/us/media/tr-4727.pdf>

QUESTION NO: 8

Which two steps are required to enable multifactor authentication on an E-Series system? (Choose two.)

- A. Test SSO login
- B. Configure In-Band Management
- C. Map roles

D. Configure LDAP

ANSWER: A B

Explanation:

Reference: <https://www.netapp.com/us/media/tr-4712.pdf>

QUESTION NO: 9

In which two locations would you find the WWPNs for a Windows host? (Choose two.)

- A. FC switch
- B. host's BIOS
- C. Windows Device Manager
- D. HBA vendor's utility

ANSWER: A D

Explanation:

Reference: https://library.netapp.com/ecm/ecm_download_file/ECMP1532524 (7)

QUESTION NO: 10

A customer intends to use an E2812 system without expansion shelves. The specification for their Windows host requires that six E-Series data volumes be used.

In this scenario, how should the system be configured?

- A. one DDP with all the volumes
- B. three DDPs with the volumes divided equally
- C. one DDP for each volume
- D. two DDPs with the volumes divided equally

ANSWER: A

Explanation:

Reference: <https://www.netapp.com/us/media/tr-4725.pdf> (37)