

DUMPS ARENA

Security-Specialist (JNCIS-SEC)

Juniper JN0-334

Version Demo

Total Demo Questions: 10

Total Premium Questions: 91

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

Which two statements describe SSL proxy on SRX Series devices? (Choose two.)

- A. SSL proxy supports TLS version 1.2.
- B. Client-protection is also known as reverse proxy.
- C. SSL proxy is supported when enabled within logical systems.
- D. SSL proxy relies on Active Directory to provide secure communication.

ANSWER: A C**Explanation:**

Reference: https://www.juniper.net/documentation/en_US/junos/topics/topic-map/security-user-auth-ssl-tls.html

QUESTION NO: 2

You must ensure that all encrypted traffic passing through your SRX device uses strong protocols and ciphers.

Which feature should you implement to satisfy this requirement?

- A. SSL proxy
- B. AppSecure
- C. JIMS
- D. JATP

ANSWER: A**QUESTION NO: 3**

You have deployed JSA and you need to view events and network activity that match rule criteria. You must view this data using a single interface.

Which JSA feature should you use in this scenario?

- A. Log Collector
- B. Assets
- C. Network Activity

D. Offense Manager

ANSWER: C

QUESTION NO: 4


What information does JIMS collect from domain event log sources? (Choose two.)

- A. For user login events, JIMS collects the username and group membership information.
- B. For device login events, JIMS collects the device IP address and operating system version.
- C. For device login events, JIMS collects the device IP address and machine name information.
- D. For user login events, JIMS collects the login source IP address and username information.

ANSWER: C D

QUESTION NO: 5

Click the Exhibit button.

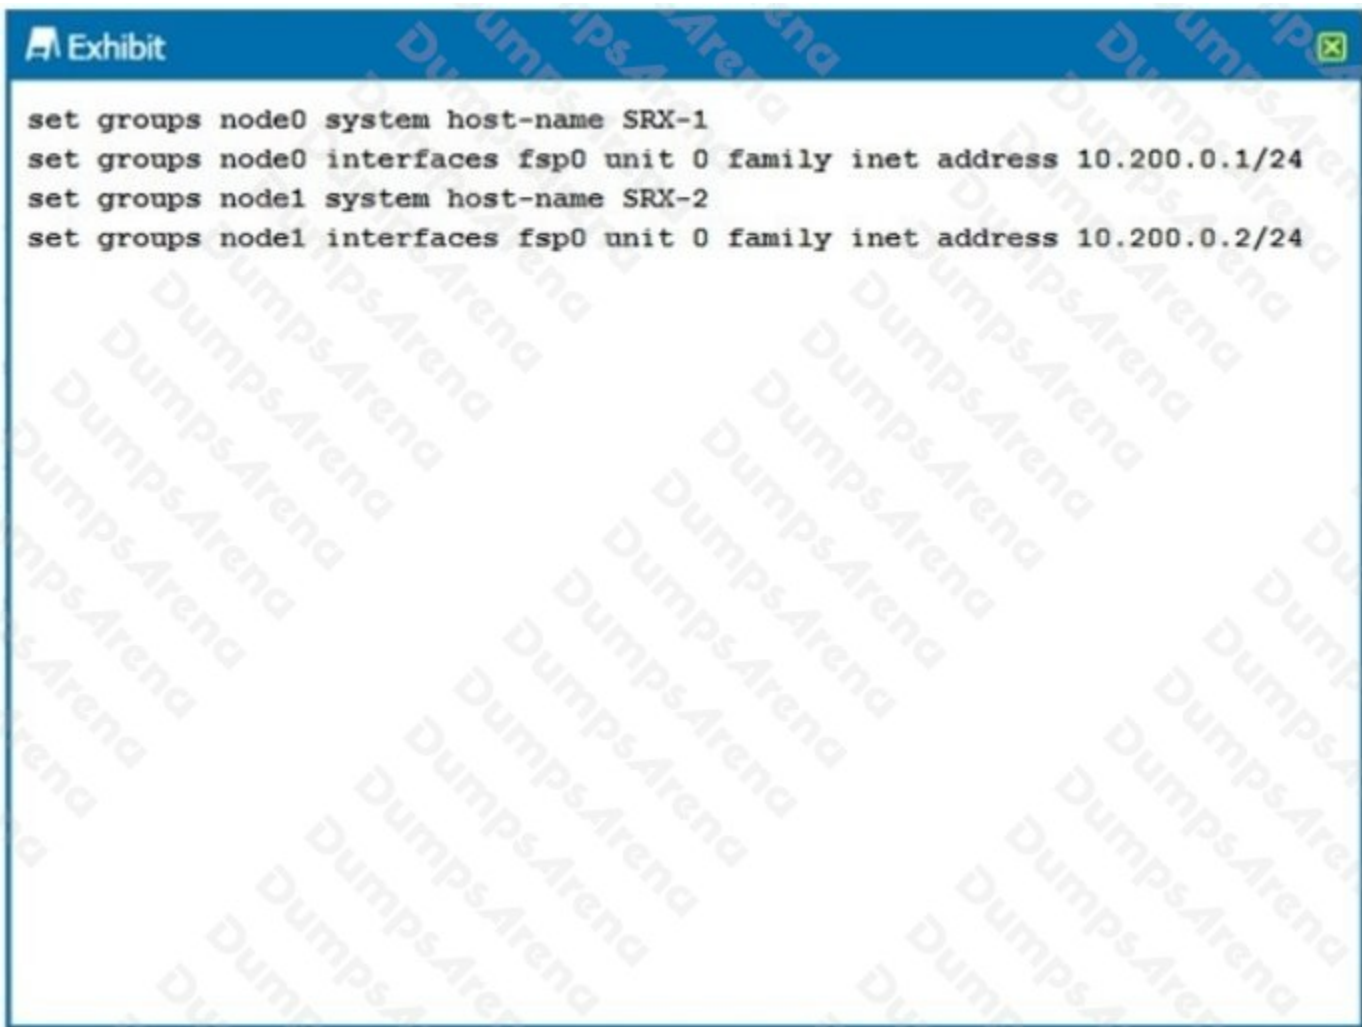

```
set groups node0 system host-name SRX-1
set groups node0 interfaces fsp0 unit 0 family inet address 10.200.0.1/24
set groups node1 system host-name SRX-2
set groups node1 interfaces fsp0 unit 0 family inet address 10.200.0.2/24
```

You are configuring an SRX chassis cluster with the node-specific hostname and management address.

Referring to the exhibit, which configuration completes this requirement?

- A. `set groups node$ interfaces fxp0 unit 0 family inet address 10.200.0.254/24 master-only`
- B. `set apply-groups node0`
`set apply-groups node1`
- C. `set apply-groups ${(node)}`
- D. `set groups node0 interfaces fxp0 unit 0 family inet address 10.200.0.254/24 master-only`
`set groups node1 interfaces fxp0 unit 0 family inet address 10.200.0.254/24 master-only`

- A. Option A
- B. Option B
- C. Option C
- D. Option D

ANSWER: C

QUESTION NO: 6

Which two functions are performed by Juniper Identity Management Service (JIMS)? (Choose two.)

- A. JIMS synchronizes Active Directory authentication information between a primary and secondary JIMS server.
- B. JIMS forwards Active Directory authentication information to SRX Series client devices.
- C. JIMS collects and maintains a database of authentication information from Active Directory domains.
- D. JIMS replicates Active Directory authentication information to non-trusted Active Directory domain controllers.

ANSWER: A C

QUESTION NO: 7

Click the Exhibit button.



```

user@srx> show log messages | match RT_FLOW_SESSION
<14>1 2019-06-03T00:36:41.130z vSRX-1 RT_FLOW - RT_FLOW_SESSION_CREATE
[junos@2636.1.1.1.2.129 source-address="172.18.2.1" source-port= "49970"
destination-address= "10.10.101.10" destination-port= "21" connection-tag= "0"
service-name= "junos-ftp" nat-source-address= "172.18.2.1" nat-source-port= "49970"
nat-destination-address= "10.10.101.10" nat-destination-port= "21"
nat-connection-tag= "0" src-nat-rule-type= "N/A" src-nat-rule-name= "N/A"
dst-nat-rule-type= "N/A" dst-nat-rule-name= "N/A" protocol-id= "6"
policy-name= "untrust-to-trust(global)" source-zone-name= "untrust"
destination-zone-name= "trust" session-id-32= "19321" username= "N/A" roles= "N/A"
packet-incoming-interface="ge-0/0/3.0" application="UNKNOWN"
nested-application= "UNKNOWN" encrypted= "UNKNOWN" application-category="N/A"
application-sub-category="N/A" application-risk= "-1"] session created
172.18.2.1/
49979->10.10.101.10/21 0x0 junos-ftp 172.18.2.1/49970->10.10.101.10/21 0x0 N/A
N/A N/A
N/A 6 untrust-to-trust(global) untrust trust 19321 N/A(N/A) ge-0/0/3.0 UNKNOWN
UNKNOWN
UNKNOWN N/A N/A -1
  
```

The output shown in the exhibit is displayed in which format?

- A. syslog

- B. WELF
- C. binary
- D. sd-syslog

ANSWER: D

QUESTION NO: 8

You must deploy AppSecure in your network to block risky applications.

In this scenario, which two AppSecure features are required? (Choose two.)

- A. AppFW
- B. AppID
- C. APBR
- D. AppTrack

ANSWER: B D

QUESTION NO: 9

Data plane logging operates in which two modes? (Choose two.)

- A. syslog
- B. binary
- C. event
- D. stream

ANSWER: C D

Explanation:

Reference: https://www.juniper.net/documentation/en_US/junos/topics/topic-map/system-logging-for-a-security-device.html

QUESTION NO: 10

You want to support reth LAG interfaces on a chassis cluster.

What must be enabled on the interconnecting switch to accomplish this task?

- A. RSTP
- B. 802.3ad
- C. LLDP
- D. swfab

ANSWER: B

Explanation:

Reference: https://www.juniper.net/documentation/en_US/junos/topics/topic-map/security-chassis-cluster-redundant-ethernet-lag-interfaces.html