

DUMPS ARENA

NetApp Certified Storage Installation Engineer, ONTAP

Network Appliance NS0-183

Version Demo

Total Demo Questions: 10

Total Premium Questions: 60

Buy Premium PDF


<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

Click the Exhibit button.

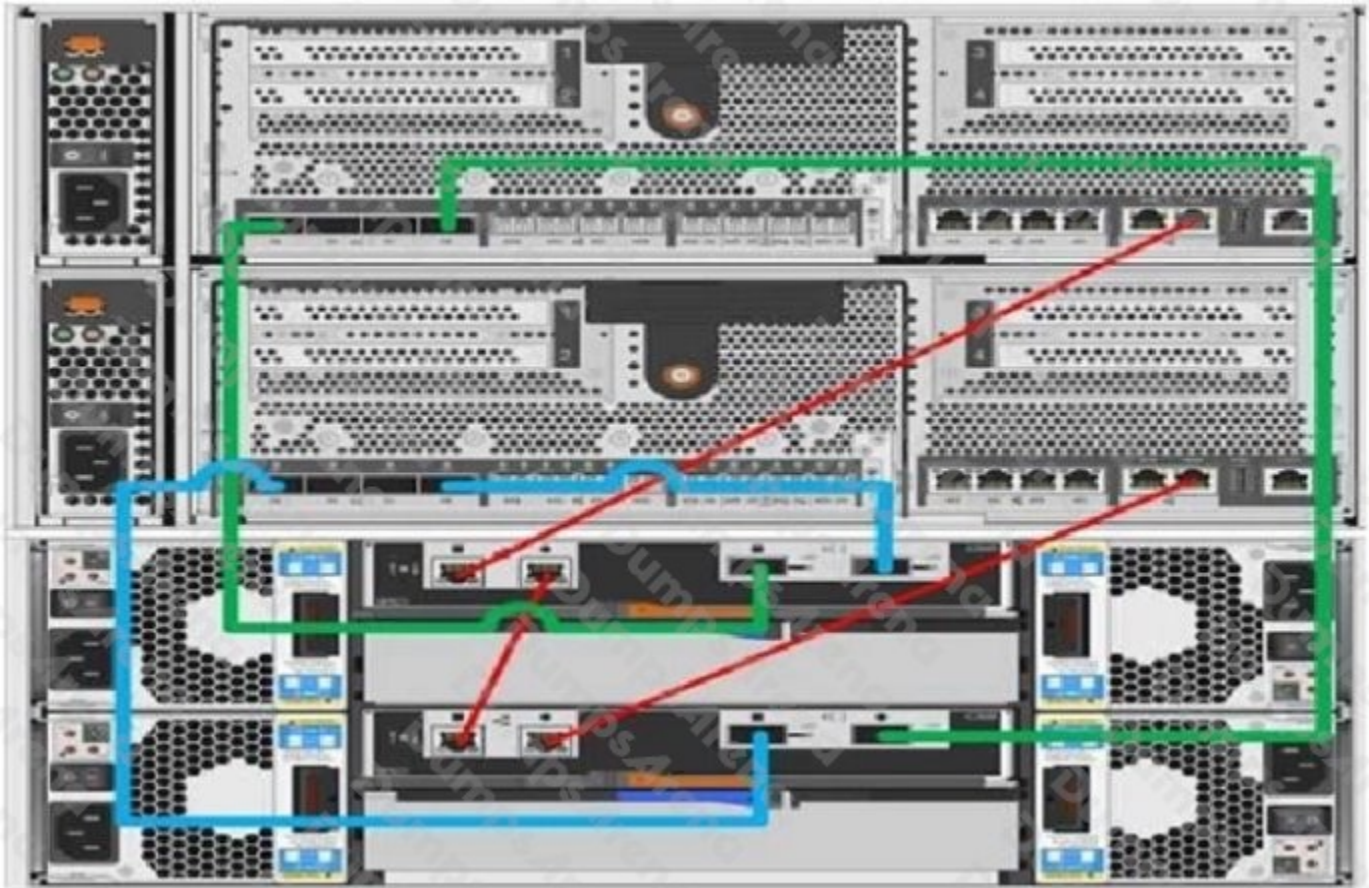

You are adding new DS224C shelves in a new stack to your cluster with FAS8060 controllers running ONTAP 9.7.

Referring to the exhibit, which two actions should be performed to the cluster before installing the new shelves? (Choose two.)

- A. Move the SAS cables to a new stack.
- B. Enable in-band ACP.
- C. Remove the Ethernet cables.
- D. Disable out-of-band ACP.

ANSWER: A D

QUESTION NO: 2

You must replace a FAS2750 switchless cluster with an AFF A220 switchless cluster for a customer. The customer requires that you transfer the data from the FAS2750 cluster to the AFF A220. In this scenario, which two methods would you use to migrate the customer's data? (Choose two.)

- A. Establish an SVM-DR relationship between the two clusters and activate the destination SVM.
- B. Remove all of the HDD drives from the FAS cluster and install them into the AFF cluster.
- C. Install SAS cables between the two clusters and use the vol move command.
- D. Provide cluster switches and build a 4-node cluster, then use the vol move command.

ANSWER: C D**QUESTION NO: 3**

You use the system health subsystem show command to troubleshoot your newly installed ONTAP cluster. In this scenario, which two health outputs would this command show you? (Choose two.)

- A. data switch cabling
- B. cluster switch cabling
- C. shelf connectivity
- D. node CPU utilization

ANSWER: C D**Explanation:**

Reference: <https://www.doc-developpement-durable.org/file/Projets-informatiques/cours-&-manuels-informatiques/Netapp/Data%20ONTAP%208.0%207-Mode%20System%20Administration%20Guide.pdf>

QUESTION NO: 4

While testing a recently installed FAS8700 cluster, a node fails. You now need to replace the impaired node. In this scenario, which two statements are true? (Choose two.)

- A. You must move the boot device from the impaired node to the replacement node.
- B. The boot device must remain intact and must not be removed from the impaired node.
- C. You can change any drives or disk shelves as part of this replacement procedure.

D. A controller model of the same type must be used to replace the impaired node.

ANSWER: A D

Explanation:

Reference: https://library.netapp.com/ecm/ecm_download_file/ECMP1147156 (2)

QUESTION NO: 5

Which three components are required when setting up a new ONTAP cluster? (Choose three.)

- A. password
- B. cluster management IP
- C. node management IP
- D. Advanced Drive Partitioning
- E. intercluster IP

ANSWER: B C E

Explanation:

Reference: <https://docs.netapp.com/ontap-9/index.jsp?topic=%2Fcom.netapp.doc.dot-cm-nmg%2FGUID-1BA3000D-2243-44E4-98CC-8D42A5C8AF8F.html>

QUESTION NO: 6

What should you do to change the data protocol of a LIF?

- A. Delete and re-recreate the LIF.
- B. Add the new data protocol to the LIF.
- C. Put the LIF in another broadcast domain.
- D. Shut down the assigned port.

ANSWER: A

Explanation:

Reference: <https://docs.netapp.com/ontap-9/index.jsp?topic=%2Fcom.netapp.doc.dot-cm-nmg%2FGUID-26EEBB35-4CA6-4814-B819-32DAB46F50E5.html>

QUESTION NO: 7

You have installed a new 2-node FAS9000 cluster with two external shelves. You want to make sure that each node has two paths to each disk in the shelves.

How do you verify your configuration?

- A. Use the storage show disk -p command.
- B. Use the storage disk option show command.
- C. Use the disk show -fields initiator command.
- D. Use the sysconfig command.

ANSWER: C**QUESTION NO: 8**

You installed a new pair of Cisco 92300YC cluster switches at a customer's site. Before you install any files on the switch, you want to view the current configuration.

In this scenario, which command would you use to accomplish this task?

- A. switchcfgshow
- B. fabricshow
- C. config show
- D. show running-config

ANSWER: A**QUESTION NO: 9**

Click the Exhibit button.

Welcome to node setup.

You can enter the following commands at any time:

"help" or "?" - if you want to have a question clarified,
"back" - if you want to change previously answered questions, and
"exit" or "quit" - if you want to quit the setup wizard.
Any changes you made before quitting will be saved.

To accept a default or omit a question, do not enter a value.

Enter the node management interface port [e0c]:

You want to add a FAS2750 HA pair to an existing 6-node cluster.

Referring to the exhibit, which action would you perform to begin adding the node?

- A. Use the back command to begin the Cluster Setup wizard.
- B. Reboot the node and enter maintenance mode and run the Cluster Setup wizard.
- C. Use the node setup wizard and select 0a as the management interface.
- D. Use the exit or quit commands then run the cluster setup command.

ANSWER: C

Explanation:

Reference: <http://docs.netapp.com/ontap-9/topic/com.netapp.doc.dot-cm-sag/System%20administration.pdf> (35)

QUESTION NO: 10

What is the default shelf ID for disk shelves with IOM12 modules?

- A. 12
- B. 01
- C. 10
- D. 00

ANSWER: D

Explanation:

Reference: <https://docs.netapp.com/platstor/index.jsp?topic=%2Fcom.netapp.doc.hw-ds-sas3-icg%2FGUID-F6882D15-2C68-40FC-AAA7-06B227B92377.html>