

DUMPS ARENA

Specialist - Implementation Engineer PowerEdge Version 2.0

EMC DES-4122

Version Demo

Total Demo Questions: 10

Total Premium Questions: 60

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

Topic Break Down

Topic	No. of Questions
Topic 1, Part 1, Misc. Questions	53
Topic 2, Exam Part 2 Performance based Simulation	7
Total	60

QUESTION NO: 1

An engineer needs to install an additional PSU on an existing, single PSU Dell EMC PowerEdge R740. They complete the initial installation and cabling procedures. They connect an AC cable and the power distribution unit produces normal AC output. The engineer checks power management and sees that the new PSU is in the Failed state.

What task should be completed to troubleshoot this issue?

- A. Confirm the System Input Power CAP is not set to Low
- B. Set the PSU AC redundancy to 1+1
- C. Set the PSU AC redundancy to 1+0
- D. Verify the new PSU is the same type and wattage rating


ANSWER: D**QUESTION NO: 2**

You are creating a new RAID 5 storage pool on a Dell EMC PowerEdge server based on 30 x 1TB drives Which PERC model best supports this configuration?

- A. S140
- B. H740P
- C. H740T
- D. H330

ANSWER: A**QUESTION NO: 3 - (DRAG DROP)**

What is the correct order of steps taken during the BIOS/UEFI Recovery process?

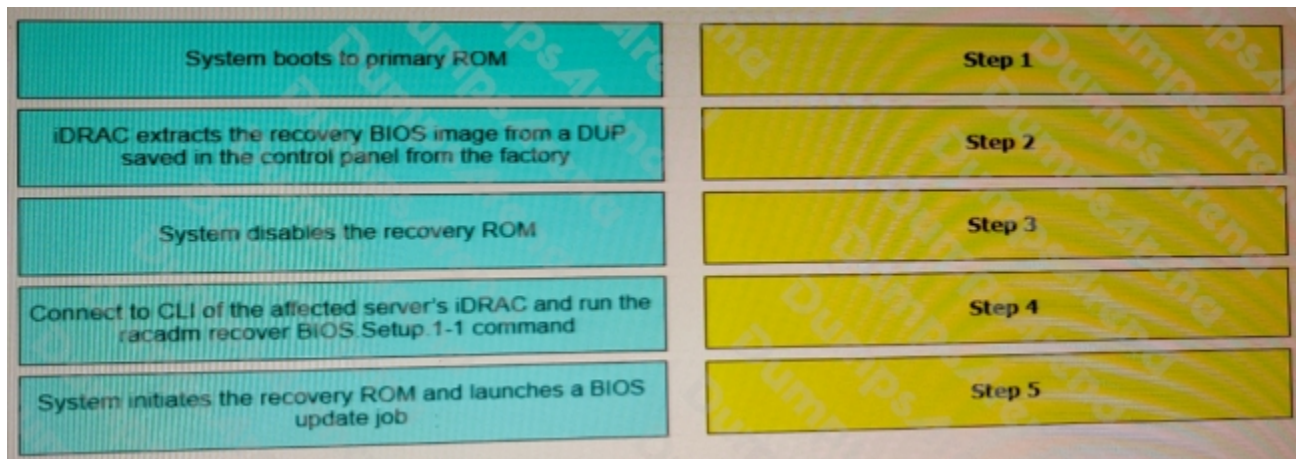

ANSWER:

QUESTION NO: 4

How can a technician know whether iDRAC9 System Lockdown mode is enabled?

- A. Lockdown activation message in red box in the iDRAC web GUI Access to LCC is disabled when the server boots
- B. Lockdown activation message in red box in the iDRAC web GUI Access to LCC requires a password when the server boots
- C. Lockdown activation message in yellow box in the iDRAC web GUI Access to LCC is disabled when the server boots
- D. Lockdown activation message in yellow box in the iDRAC web GUI Access to LCC requires a password when the server boots

ANSWER: C

QUESTION NO: 5

What is required for iDRAC Direct 2.0 to connect with iDRAC9 interfaces such as RACADM and WSMAN?

- A. Wi-Fi connection
- B. NFC connection
- C. Ethernet cable
- D. Micro-AB USB

ANSWER: D

QUESTION NO: 6

How can the ePSA be accessed?

- A. iDRAC
- B. Lifecycle Controller
- C. VMware vSphere plug-in
- D. OMSA

ANSWER: A

QUESTION NO: 7

What is a key distinction between iDRAC8 and iDRAC9?

- A. iDRAC9 offers HTML5 based GUI
- B. iDRAC9 default credentials are root/calvin orderable only
- C. iDRAC8 offers HTML5 based GUI
- D. iDRAC8 default credentials are customer orderable

ANSWER: D

QUESTION NO: 8

What is required to use the iSM Automatic System Recovery feature?

- A. Server Administrator installed
- B. OS watchdog timer disabled
- C. Server Administrator not installed
- D. OS watchdog timer enabled

ANSWER: B

QUESTION NO: 9

What is a characteristic of out-of-band management?

- A. Dedicated device
- B. Agent based


C. Less secure

D. Dependent upon OS

ANSWER: A

QUESTION NO: 10 - (SIMULATION)

For security reasons, the Dell EMC PowerEdge server power button must be disabled. Use the System Setup Utility in the simulator to disable the power button. When you have finished using the simulator, click Next.

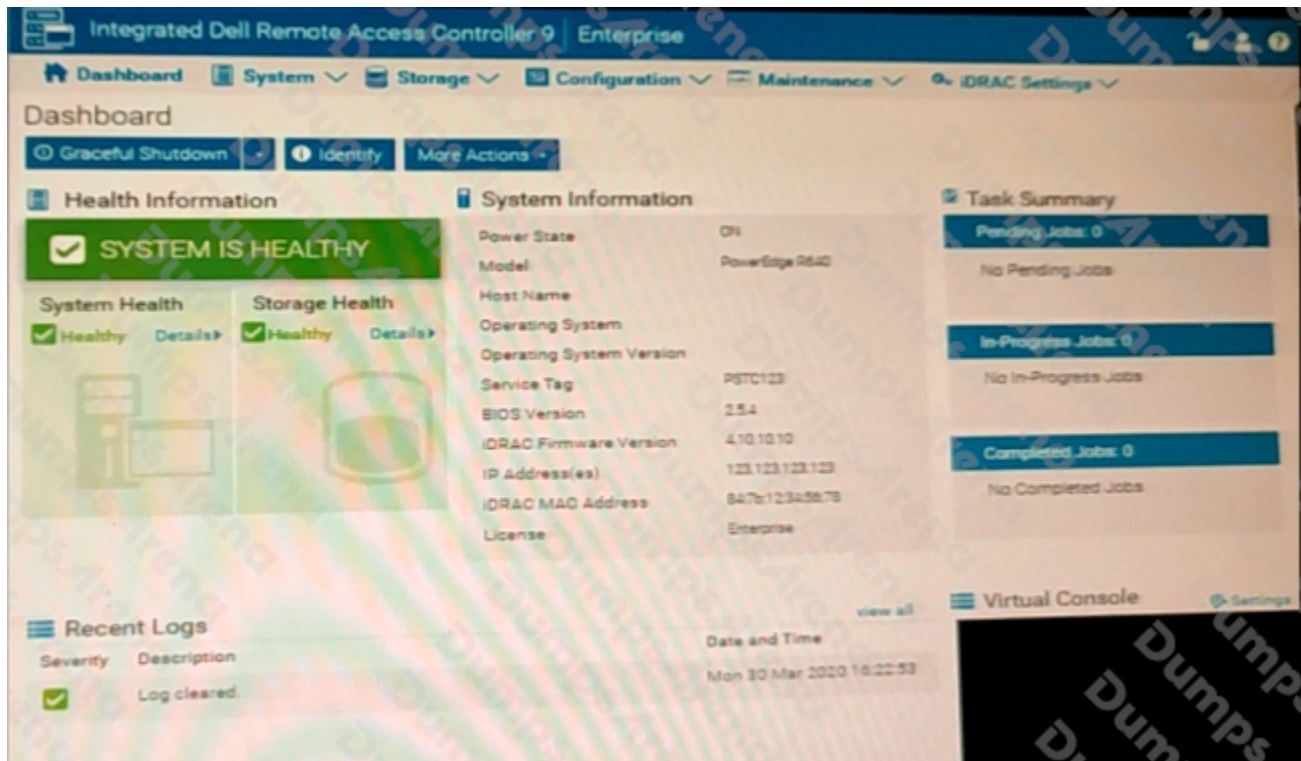

ANSWER: Send your suggestion for this simulation task.