

DUMPS ARENA

NetApp Certified Implementation Engineer - SAN Specialist - E-Series

Netapp NS0-516

Version Demo

Total Demo Questions: 10

Total Premium Questions: 64

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

Click the Exhibit button.

Supported Adapter Cards – E2812 Duplex 16Gb 10GbE Base-T 11.50 SANtricity OS							
Adapters							
Priority	Category	Bus Type	Mktg Part No	Images	LED	Mfg Part No	Description
1	Block Access	PCIe2	X-56023-00-0E-C		View		HIC.E2800.10Gb Base-T.2-ports, -C
2	Block Access	PCIe2	X-56026-00-0E-C		View		HIC.E2800.12Gb SAS.2-ports, -C
3	Block Access	PCIe2	X-56027-00-0E-C		View		HIC.E2800.12Gb SAS.4-ports, -C

You ordered a NetApp E2812 Duplex 16GB 10 GbE Base-T system.

Referring to the exhibit, what is the maximum number of 10GbE Base-T ports available to be used?

- A. 8
- B. 4
- C. 6
- D. 12

ANSWER: B

QUESTION NO: 2

Click the Exhibit button.

Referring to the exhibit, which three steps would you take to solve the problem shown in the event log? (Choose three.)

A:9/7/15 12:09:22 AM (07:09:22) 55985 1017 Fibre channel link down – Host-side: controller in slot A, port 2
 A:9/7/15 12:09:22 AM (07:09:22) 55986 1018 Fibre channel link up – Host-side: controller in slot A, port 2
 A:9/7/15 12:09:26 AM (07:09:26) 55990 1017 Fibre channel link down – Host-side: controller in slot A, port 2
 A:9/7/15 12:09:26 AM (07:09:26) 55991 1018 Fibre channel link up – Host-side: controller in slot A, port 2
 A:9/7/15 12:09:30 AM (07:09:30) 55993 1017 Fibre channel link down – Host-side: controller in slot A, port 2
 A:9/7/15 12:09:30 AM (07:09:30) 55994 1018 Fibre channel link up – Host-side: controller in slot A, port 2
 A:9/7/15 12:09:33 AM (07:09:33) 55996 1017 Fibre channel link down – Host-side: controller in slot A, port 2
 A:9/7/15 12:09:33 AM (07:09:33) 55997 1018 Fibre channel link up – Host-side: controller in slot A, port 2

- A. Swap out the SFP in the controller port

- B. Swap out the FC cable
- C. Reinitialize the FC switch
- D. Move the connection to another controller port
- E. Swap out the HBA on the FC switch

ANSWER: A B E

QUESTION NO: 3

Which three documents should be provided to the customer after the E-Series installation is complete? (Choose three.)

- A. a document showing how much space is available for system expansion
- B. a document showing the cabinet layout with cabling information and IP addresses being used
- C. a document showing user IDs and passwords for all deployed devices
- D. a document with IMT pages that show the supported host configuration and fabric switches in the solution
- E. a document showing available power on the UPS with no equipment connected

ANSWER: B C E

QUESTION NO: 4

Click the Exhibit button.

Rock_Group

(Optimal) (14 drives, 17820.00 GiB capacity, [2 free capacity areas](#))



Secure-capable Yes (not enabled) | DA No

An administrator is asked to create a 5532 GiB volume from the volume group.

Referring to the exhibit, how would the administrator complete this request?

- A. Create the volume after performing space reclamation
- B. Create the volume after consolidating the capacity
- C. Create the volume from the available capacity
- D. Create the volume after adjusting the preservation capacity

ANSWER: B**QUESTION NO: 5**

Which two errors would fail a pre-upgrade health check? (Choose two.)

- A. Hot spares are in use
- B. Volumes are reported on a non-preferred path
- C. An excess number of event log events are present
- D. I/O is being processed

ANSWER: A C**QUESTION NO: 6**


Your AutoSupport does not automatically send reports to NetApp's ActiveIQ tool.

In this scenario, how do you access the data that would have been sent using the AutoSupport feature?

- A. Use SANtricity Unified Manager to collect the support data remotely
- B. Access the event log by using SANtricity System Manager
- C. Use SANtricity System Manager to manually collect the support data
- D. Ask NetApp Support to help you to access the data by using special support tools

ANSWER: C**QUESTION NO: 7**

Click the Exhibit button.

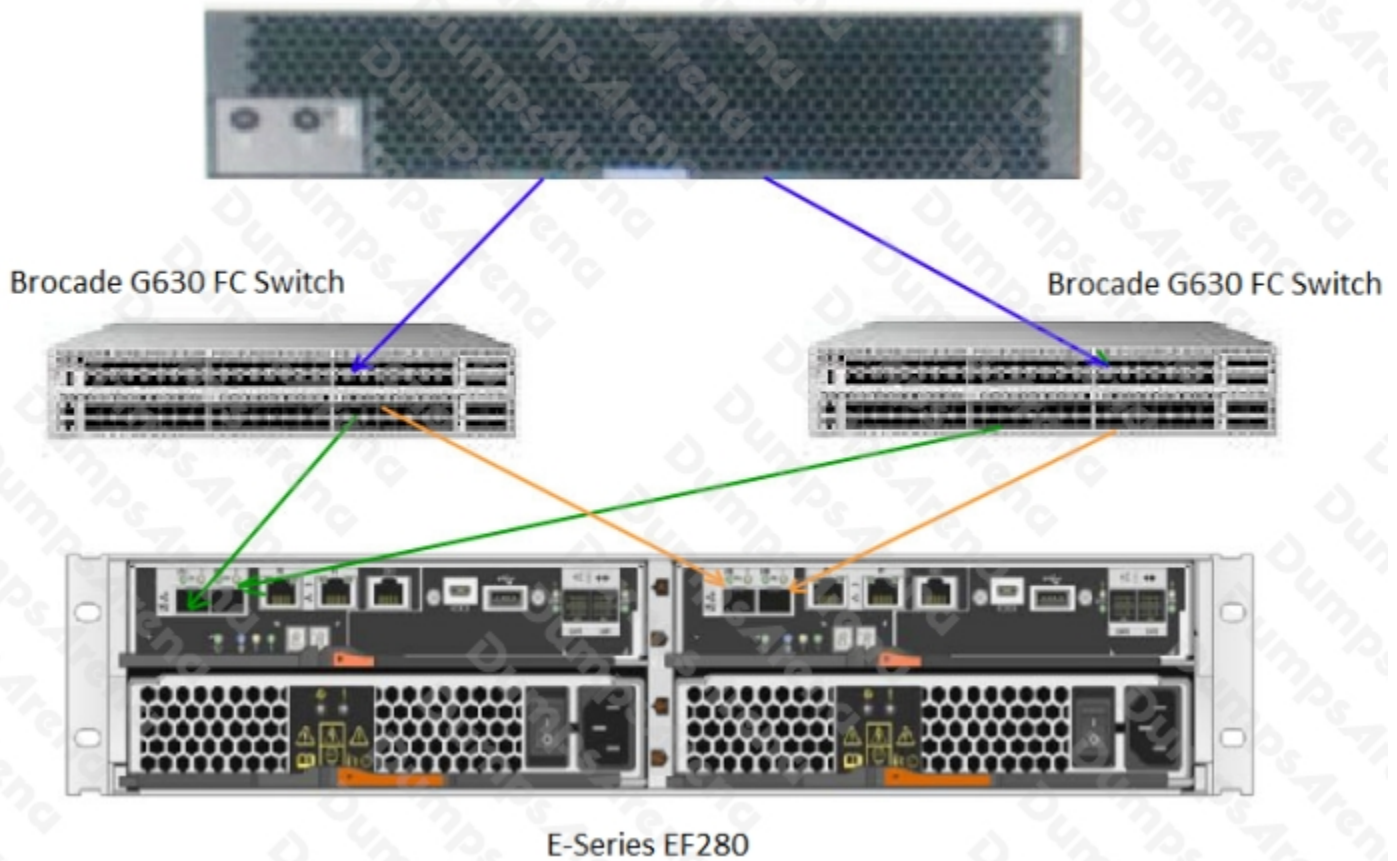

A customer's host is running a Red Hat Enterprise Linux 7.6 server with dm-mp configured for ALUA and is connected to a single volume on the EF280 system that is shown in the exhibit.

In this scenario, how many active/optimized paths are available to the volume?

- A. 2
- B. 8
- C. 4
- D. 6

ANSWER: C

QUESTION NO: 8

Which command collects detailed diagnostic information from a Brocade FC switch?

- A. supportshow
- B. showsupport
- C. diagshow

D. showdiag

ANSWER: A

QUESTION NO: 9

Which three factors should you consider before you install an E2860 in a data center? (Choose three.)

- A. current draw
- B. heat dissipation
- C. fire suppression capacity
- D. electromagnetic interference
- E. ambient temperatures

ANSWER: A B E

QUESTION NO: 10

When working on a customer's E-Series system to configure LDAP, you realize that you need to complete a Certificate Signing Request to receive a certificate.

In this scenario, when entering the information for the CSR, what information do you need from the controllers themselves? (Choose three.)

- A. the controller's alternate IP addresses
- B. the controller's serial number
- C. the controller's geographical location
- D. the controller's common name
- E. the controller's alternate names

ANSWER: A D E