

DUMPS ARENA

Associate - Networking Version 2.0?(DCA)

EMC DEA-5TT2

Version Demo

Total Demo Questions: 10

Total Premium Questions: 61

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

In which Spanning Tree protocol state does a port record MAC addresses but does not forward the data?

- A. Forwarding
- B. Blocking
- C. Learning
- D. Listening

ANSWER: C

QUESTION NO: 2

What is the aggregated lanes' maximum speed rating for a QSFP28 transceiver?

- A. 4 Gbps
- B. 40 Gbps
- C. 112 Gbps
- D. 128 Gbps

ANSWER: C

QUESTION NO: 3

Which Border Gateway Protocol (BGP) version supports IPv6?

- A. BGPng
- B. BGPv2
- C. BGPv3
- D. BGPv4

ANSWER: D

QUESTION NO: 4

Which component translates data, signaling, and protocols to facilitate the data flow between the end device and the network?

- A. Switch
- B. Transceiver
- C. NIC
- D. Port

ANSWER: B

QUESTION NO: 5

What is the bandwidth of an RPM for a C9010 Network Director?

- A. 200 Mbps
- B. 2.56 Mbps
- C. 1.52 Tbps
- D. 2.56 Tbps

ANSWER: D

Explanation:

Reference: http://i.dell.com/sites/doccontent/shared-content/data-sheets/en/documents/dell_networking_c9000_specsheet.pdf

QUESTION NO: 6 - (DRAG DROP)


What is the correct sequence of steps when a web browser accesses a web server?

Browser requests a web page using HTTP	Step 1
Browser resolves the domain name using DNS	Step 2
Web server sends the requested web page using HTTP	Step 3
Browser establishes a TCP connection with the web server	Step 4

ANSWER:



Explanation:

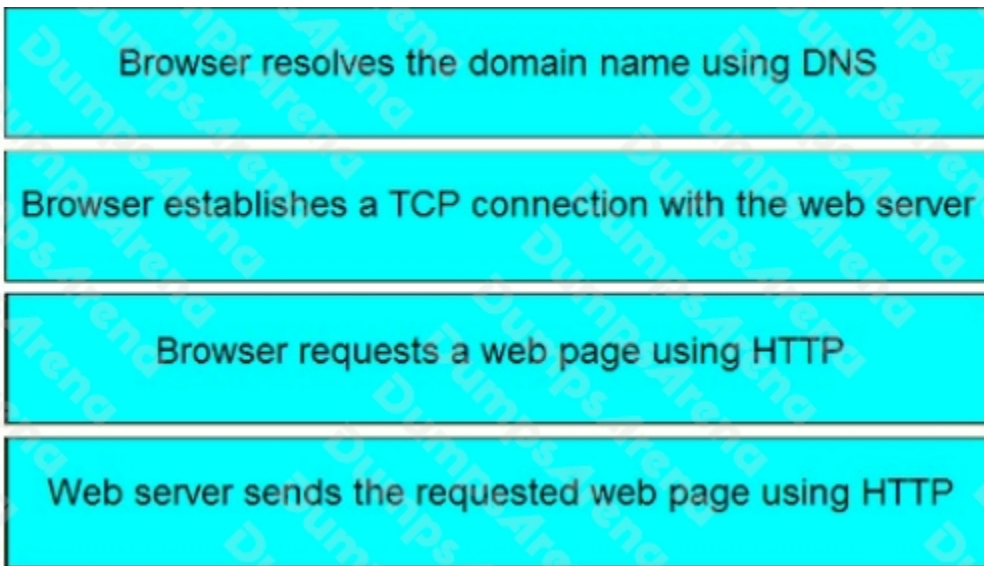

QUESTION NO: 7

Which IEEE standard defines the Data Link Layer, Discovery protocol?

- A. 802.1AB
- B. 802.1AX
- C. 802.1D
- D. 802.1W

ANSWER: A

Explanation:

Reference: http://www.ieee802.org/3/frame_study/0409/blatherwick_1_0409.pdf

QUESTION NO: 8


What is the default OSPF “hello interval”?

- A. 5 seconds
- B. 10 seconds
- C. 15 seconds
- D. 30 seconds

ANSWER: B

QUESTION NO: 9

Refer to the exhibit.

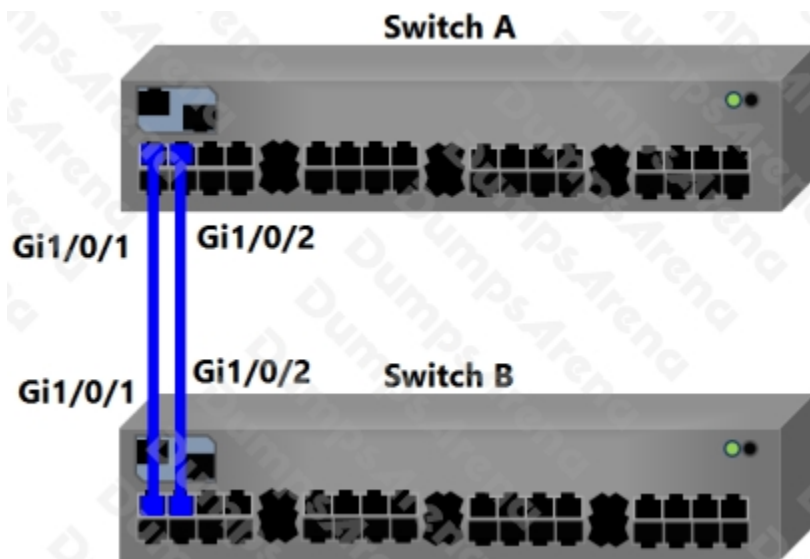

Switch A and Switch B are connected to each other. Both switches use interfaces Gi1/0/1 and Gi1/0/2. Switch A has a Spanning Tree priority of 8192 and Switch B has the default priority. Which interface becomes the root port?

- A. Switch A Gi1/0/1
- B. Switch A Gi1/0/2
- C. Switch B Gi1/0/1
- D. Switch B Gi1/0/2

ANSWER: A

QUESTION NO: 10

How many total addresses for network, broadcast, and host are provided with the subnet mask 255.255.255.240?

- A. 8

B. 16

C. 24

D. 48

ANSWER: B