

DUMPS ARENA

PeopleSoft PeopleTools 8.5x Implementation Essentials

Oracle 1z0-632

Version Demo

Total Demo Questions: 10

Total Premium Questions: 80

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

While in the office on his desktop computer, a user personalizes his fluid homepage by adding a tile for the My contacts component. The next day at the airport, the user attempts to access the My Contacts component using his smartphone. Unfortunately, he cannot see the My Contacts tile on his field homepage.

Why is the user unable to find the My Contacts tile on his fluid homepage when using his smartphone?

- A. The user does not have the Smartphone Access check box enabled in his personalization's
- B. The smartphone does not have a supported version of its operating system
- C. The style, ps_homepage-phone, has not been applied on the Fluid tab of the Component Properties dialog box
- D. The Display on Small Form Factor Homepage check box has not been selected on the Fluid tab of the Component Properties dialog box
- E. The component does not contain any pages of type Small Form Factor

ANSWER: D**QUESTION NO: 2**

Examine this PeopleCode program excerpt:

```
class OCP_ROWSET extends Rowset
    property integer FilledRowCount get;
    method OCP_ROWSET(&strRecName As string, &strDataFld As string, &strGetOrCreate As
string);
    method InsertRow(&iRow As integer) Returns boolean;
end-class;
```

Select the three correct statements. (Choose three.)

- A. The OCP_ROWSET method runs automatically whenever an object is instantiated from the OCP_ROWSET class
- B. OCP_ROWSET is the constructor method for the OCP_ROWSET class
- C. Executing the RO_ROWSET method instantiates an object of the OCP_ROWSET class
- D. The OCP_ROWSET method must initialize an object of the Rowset class
- E. The OCP_ROWSET method is added to the Rowset class, and, by extension, to any instances of the Rowset class

ANSWER: A B D

QUESTION NO: 3

Identify three true statements describing PeopleTools tables. (Choose three.)

- A. PeopleTools tables can be updated equally using PeopleTools, such as Application Designer, or the SQL editing tool for your database platform
- B. PeopleTools tables use the naming convention of having the prefix PD*, as in PSRECDEFN
- C. PeopleTools tables store metadata that defines the elements of a PeopleSoft application
- D. PeopleTools tables contain the same content, regardless of the PeopleSoft application installed on the database
- E. PeopleTools tables have a consistent structure, regardless of the PeopleSoft application installed on the database
- F. PeopleTools tables are empty until the implementation team has loaded the application's transactional data

ANSWER: A B C**QUESTION NO: 4**

Examine this PeopleCode program excerpt:

```
&Row_Level1 = &RS_Level1(&I);  
&Rec_Empl = &Row_Level1.EMPL;  
&Fld_Role = &Rec_Empl.ROLE;  
&Pos = &Fld_Role.Value;
```

Select the option that correctly combines these four statements into one valid PeopleCode statement.


- A. `&Pos = &Row_Level1(Record.EMPL).ROLE.Value;`
- B. `&Pos = &RS_Level1(&I).EMPL.ROLE.Value;`
- C. `&Pos = &Row_Level1(&I).EMPL.ROLE.Value;`
- D. `&Pos = &RS_Level1.Row_Level1.Rec_Empl.ROLE.Value;`
- E. `&Pos = &RS_Level1.&I.EMPL.ROLE.Value;`

- A. Option A
- B. Option B
- C. Option C
- D. Option D
- E. Option E

ANSWER: C

QUESTION NO: 5

The following FieldChange program conditionally populates DERIVED.EDITABLE, based on the value of PSU_EMP_RVW_RVR.REVIEW_TYPE.

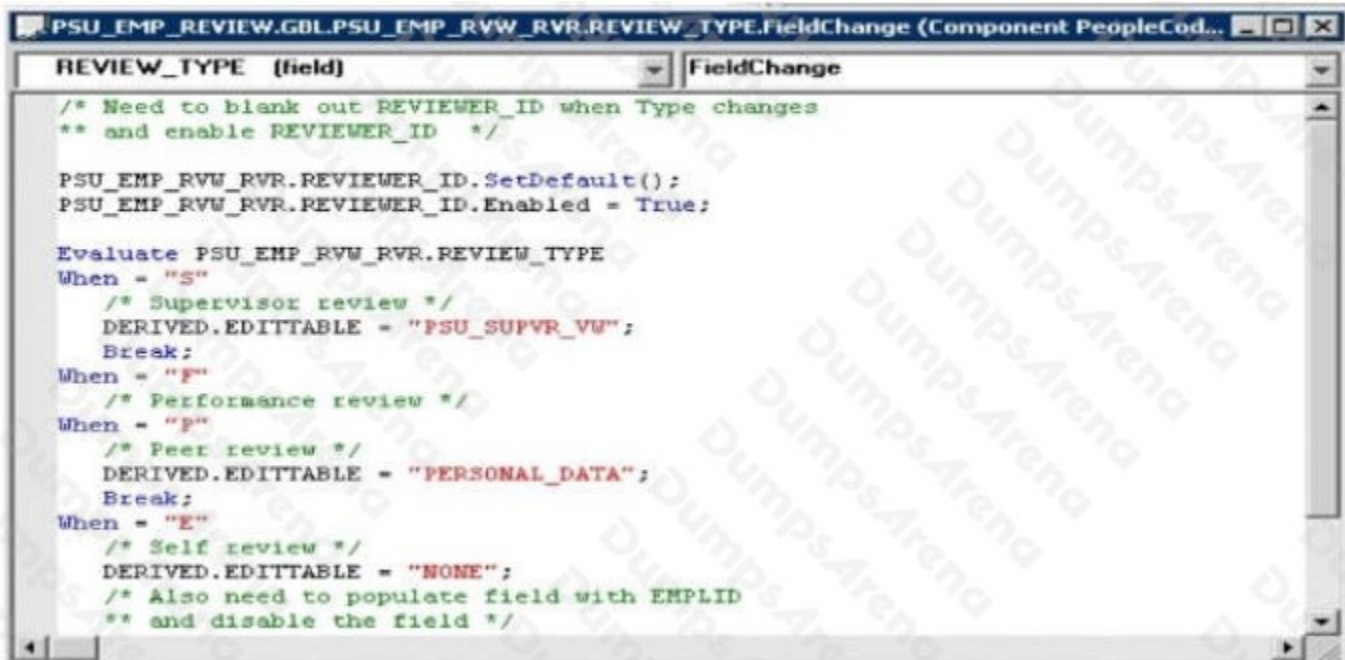

```
PSU_EMP_REVIEW.GBL.PSU_EMP_RVW_RVR.REVIEW_TYPE.FieldChange (Component PeopleCod...
REVIEW_TYPE (field) FieldChange
/* Need to blank out REVIEWER_ID when Type changes
** and enable REVIEWER_ID */
PSU_EMP_RVW_RVR.REVIEWER_ID.SetDefault();
PSU_EMP_RVW_RVR.REVIEWER_ID.Enabled = True;

Evaluate PSU_EMP_RVW_RVR.REVIEW_TYPE
When = "S"
  /* Supervisor review */
  DERIVED.EDITABLE = "PSU_SUPVR_VW";
  Break;
When = "P"
  /* Performance review */
When = "P"
  /* Peer review */
  DERIVED.EDITABLE = "PERSONAL_DATA";
  Break;
When = "E"
  /* Self review */
  DERIVED.EDITABLE = "NONE";
  /* Also need to populate field with EMPLID
  ** and disable the field */
```

Another similar program should be placed in a companion event. In which other event should the other PeopleCode program be placed?

- A. SavePreChange
- B. FieldEdit
- C. Rowinit
- D. Rowinsert

ANSWER: C

QUESTION NO: 6

What are the required steps for using a PeopleCode application class? Arrange them in the correct order.

1. Declare an object of the application class.
2. Import the application class.
3. Invoke methods or use properties.
4. Instantiate the object.
5. Initialize the object.

- A. 1, 2, 5, 3
- B. 1, 2, 4, 5, 3
- C. 2, 1, 4, 3
- D. 1, 2, 4, 3
- E. 2, 1, 4, 5, 3

ANSWER: E

Explanation:

Reference: https://docs.oracle.com/cd/E13292_01/pt849pbr0/eng/psbooks/tpcr/htm/tpcr07.htm

QUESTION NO: 7

Which three statements are true regarding PeopleCert user-defined variables? (Select three.)

- A. Explicitly declaring object type variables provides no benefit over allowing them to be autodeclared
- B. All local variables must be declared at the beginning of the program
- C. Local variables can be declared and instantiated in a single statement
- D. All component variables must be declared before the first line of executable code
- E. Local variables can be declared and assigned in a single statement
- F. All variables of type Any must be explicitly declared

ANSWER: D

QUESTION NO: 8

Select three changes to a record definition that require you to rebuild the SQL table. (Choose three.)

- A. You change an ascending key to a descending key
- B. You deselect the Alternate Search Key check box
- C. You change the length of a non-key field

- D. You deselect the Search Key check box (only) for a field
- E. You change the label of a key field

ANSWER: A C D

QUESTION NO: 9

Select the two Application Designer definitions that demonstrate how referential integrity is maintained in PeopleSoft applications. (Select two.)

A.

	Page Name	Item Name	Hidden	Item Label	Folder Tab Label
1	PSU_CUST	PSU_CUST_TABLE	<input checked="" type="checkbox"/>	Customer Table	

B.

Num	Field Name	Type	Len	Format	Short Name	Long Name
1	SETID	Char	5	Upper	SetID	SetID
2	ITEM_CD	Char	6	Upper	Item	Item Code
3	EFFDT	Date	10		Eff Date	Effective Date
4	EFF_STATUS	Char	1	Upper	Status	Status as of Effective D
5	DESCR	Char	30	Mixed	Descr	Description
6	PRICE	Nbr	6,2		Price	Price
7	DESCRLONG	Long	0		Descr	Description

C.

Num	Field Name	Type	Req	Edit	Prompt Table
1	ORDER_NBR	Char	Yes		
2	BUSINESS_UNIT	Char	Yes	Prompt	BUS_UNIT_TBL_TR
3	ORDER_DT	Date	Yes		
4	VENDOR_CD	Char	No	Prompt	PSU_VENDOR_TBL
5	ORDER_STATUS	Char	No	>dat	
6	STATUS_DT	Date	No		
7	DELIVER_METHOD	Char	No	Prompt	PSU_TRANSPT_TBL
8	ADDED_BY	Char	No		
9	APPR_STATUS	Char	No	>dat	
10	APPR_INSTANCE	Nbr	No		

D.

```

PSU_CUST.GBL [component] SavePostChange
If FieldChanged(PSU_CUST_TBL.STREET1) Or
FieldChanged(PSU_CUST_TBL.CITY) Or
FieldChanged(PSU_CUST_TBL.STATE) Or
FieldChanged(PSU_CUST_TBL.ZIP) Or
FieldChanged(PSU_CUST_TBL.COUNTRY) Or
FieldChanged(PSU_CUST_TBL.PHONE) Then
SQLExec("Update PS_PSU_STUDENT_TBL set STREET1 = :1, CITY = :2, STATE = :3,
ZIP = :4, COUNTRY = :5, PHONE = :6 Where CUSTOMER_ID = :7 and SAME_ADDR_CUSTOMER
= 'Y' ", PSU_CUST_TBL.STREET1, PSU_CUST_TBL.CITY, PSU_CUST_TBL.STATE,
PSU_CUST_TBL.ZIP, PSU_CUST_TBL.COUNTRY, PSU_CUST_TBL.PHONE,
PSU_CUST_TBL.CUSTOMER_ID);
End-If;

```

- A. Option A
- B. Option B
- C. Option C
- D. Option D

ANSWER: C D

QUESTION NO: 10

Which two statements are true about how PeopleCode on the SavePreChange and SavePostChange events is processed?
(Choose two.)

- A. When placed at the component record level, such PeopleCode triggers a Save when a row is changed
- B. When placed at the component record level, such PeopleCode runs once per row when the user clicks Save
- C. When placed at the component record level, such PeopleCode runs once when the user clicks Save
- D. When placed at the component level, such PeopleCode triggers a Save when data on the page is changed
- E. When placed at the component level, such PeopleCode runs once when the user clicks Save
- F. When placed at the component level, such PeopleCode runs once per row when the user clicks Save

ANSWER: B D