

DUMPS ARENA

MuleSoft Certified Developer - Level 1 (Mule 4)

Mulesoft MuleSoft-Certified-Developer-Level-1

Version Demo

Total Demo Questions: 10

Total Premium Questions: 118

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

What is the DataWeave expression to log the Content-Type header using a Logger component?

- A. `#[["Content-Type: " ++ attributes.headers.'content-type']`
- B. `#[["Content-Type: " ++ headers.'content-type']`
- C. `#[["Content-Type: " + headers.'content-type']`
- D. `#[["Content-Type: " + attributes.headers.'content-type']`

ANSWER: A**QUESTION NO: 2**

What is the value of the stepVar variable after the processing of records in a Batch Job?

- A. -1
- B. 0
- C. Null
- D. Last value from flow

ANSWER: C**QUESTION NO: 3**

What is the difference between a subflow and a sync flow?

- A. Sync flow has no error handling of its own and subflow does.
- B. Subflow has no error handling of its own and sync flow does.
- C. Subflow is synchronous and sync flow is asynchronous.
- D. No difference.

ANSWER: B

QUESTION NO: 4

A company has an API to manage purchase orders, with each record identified by a unique purchase order ID. The API was built with RAML according to MuleSoft best practices.

What URI should a web client use to request order PO5555?


- A. /orders/{PO5555}
- B. /orders/order=PO5555
- C. /orders?order=PO5555
- D. /orders/PO5555

ANSWER: A**Explanation:**

Reference: <https://docs.mulesoft.com/design-center/design-common-problems-raml-08>

QUESTION NO: 5

Refer to the exhibits.

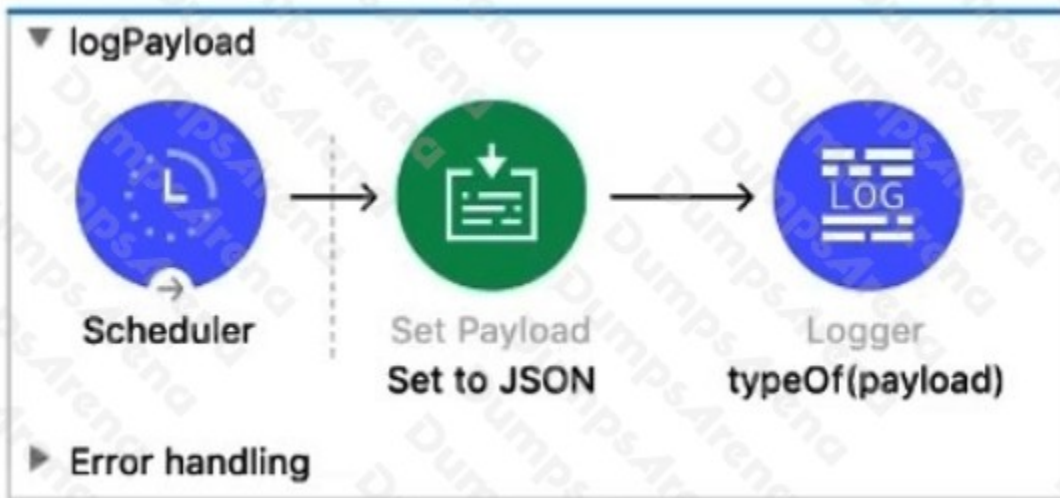

```
<flow name="logPayload" >
  <scheduler doc:name="Scheduler" >
    <scheduling-strategy >
      <fixed-frequency />
    </scheduling-strategy>
  </scheduler>
  <set-payload doc:name="Set to JSON" value='#[{
    "accounts": {
      "account": {
        "accountName": "ABC Widgets",
        "type": "New Customer",
        "stage": "Qualification"
      }
    }
  }]' />
  <logger level="INFO" doc:name="typeOf(payload)" message='#[typeOf(payload)]' />
</flow>
```

A JSON payload is set in the Set Payload transformer.

What is logged by the Logger?

- A. "String"
- B. "Object"
- C. "Array"
- D. "JSON"

ANSWER: A

QUESTION NO: 6

What is a core characteristic of the Modern API?

- A. API is rapidly prototyped following AGILE methodology.
- B. API follows the RESTful architecture.
- C. API is designed first using an API specification for rapid feedback.
- D. API has a mechanism to accept feedback and suggestions for improvement.

ANSWER: C

QUESTION NO: 7

Refer to the exhibits.

```
##%RAML 1.0 DataType                                ##%RAML 1.0 NamedExample
# bookDataType.raml                                # bookExample.raml

type: object                                       bookExample:
properties:                                       |
  ID?: integer                                    | ID: 101
  title: string                                   | title: Shakespeare
  author: string                                  | author: Encyclopaedia Britannica
  publisher?: string                              | publisher: John Wiley & Sons
  year: integer                                   | year: 2007
  ISBN:                                           | ISBN: "0471767840"
  |
  type: string
  required: true
```

A company has defined this Book data type and Book example to be used in APIs.

What is valid RAML for an API that uses this Book data type and Book example?

A. `##RAML 1.0`
`title: Books`

`Book: BookDataType.raml`

`/books:`
`post:`
`body:`
`application/json:`
`type: Book`
`examples:`
`input: BookExample.raml`
`responses:`
`201:`
`body:`
`application/json:`
`example:`
`message: Book added`

B. `##RAML 1.0`
`title: Books`

`Book: !include BookDataType.raml`

`/books:`
`post:`
`body:`
`application/json:`
`type: Book`
`examples:`
`input: !include BookExample.raml`
`responses:`
`201:`
`body:`
`application/json:`
`example:`
`message: Book added`

C. `##RAML 1.0`
`title: Books`

`types:`
`Book: ABC/DataTypes/BookDataType.raml`

`/books:`
`post:`
`body:`
`application/json:`
`type: Book`
`examples:`
`input: ABC/Examples/BookExample.raml`
`responses:`
`201:`
`body:`
`application/json:`
`example:`
`message: Book added`

D. `##RAML 1.0`
`title: Books`

`types:`
`Book: !include BookDataType.raml`

`/books:`
`post:`
`body:`
`application/json:`
`type: Book`
`examples:`
`input: !include BookExample.raml`
`responses:`
`201:`
`body:`
`application/json:`
`example:`
`message: Book added`

A. Option A

B. Option B

- C. Option C
- D. Option D

ANSWER: A

QUESTION NO: 8

Which keyword do you use to create a new function in DataWeave?

- A. function
- B. fun
- C. func
- D. None of these

ANSWER: B

QUESTION NO: 9

What is the object type returned by the File List operation?

- A. Object of String file names
- B. Array of String file names
- C. Object of Mule event objects
- D. Array of Mule event objects

ANSWER: D

QUESTION NO: 10

How does Runtime Manager Console connect with App Data and Logs of a Mule app?

- A. None of these
- B. Integration Apps
- C. CloudHub Workers
- D. Rest API

ANSWER: D