

DUMPS ARENA

Salesforce Certified OmniStudio Developer

Salesforce OmniStudio-Developer

Version Demo

Total Demo Questions: 10

Total Premium Questions: 86

Buy Premium PDF

<https://dumpsarena.co>

sales@dumpsarena.co

sales@dumpsarena.co
dumpsarena.co

QUESTION NO: 1

A developer creates an OmniScript to update billing information. After analyzing the different types of customer interactions that occur at the company, the developer determines updating billing information should be included in the majority of customer interactions, which are represented by more than 20 different FlexCards.

What is the most efficient way for the developer to configure the action that invokes the OmniScript?

- A. As an OS Action
- B. As a Custom Action
- C. As an OmniStudio Action
- D. As a Lightning Action

ANSWER: A**QUESTION NO: 2**

Which two fields in an Integration Procedure can use a function like CONCAT or DATEDIFF?

Choose 2 answers

- A. In Procedure Configuration, in a Tracking Custom Data value field.
- B. In a Remote Action, in a Remote Options value field.
- C. In a Remote Action, in an Additional Output value field.
- D. In a Response Action, in an Additional input value field.

ANSWER: C D**QUESTION NO: 3**

A developer is configuring a DataRaptor Load to Save contract data. The developer needs to set the record type of the contact using DeveloperName.

Which two configuration actions should the developer take to set this up in the DataRaptor Load?

- A. Check is Lookup property when mapping the fields.
- B. Add Link to RecordType object in the Contact Object with the id field of RecordType object.
- C. Select RecordType in the Lookup object list. Development in the lookup Field list, and ID in the Lookup Requested Field list.

D. Select RecordType in the Lookup Object list. ID in the Lookup Field list, and Development in the Lookup requested Field list.

ANSWER: A C

QUESTION NO: 4

A developer needs to configure a DataRaptor to retrieve data from a single object. The structure of the output data does not need to be changed.

Following best practices, which type of DataRaptor should the developer use?

- A. DataRaptor Transform
- B. DataRaptor Extract
- C. DataRaptor Load
- D. DataRaptor Turbo Extract

ANSWER: D

QUESTION NO: 5

A developer has a requirement to create a child FlexCard that contains all of its parent FlexCard's records In a Datable How should the developer configure the parent FlexCard's Node?

- A. {Records{0}}
- B. {Records}
- C. {Params, records}
- D. {Recorded}

ANSWER: B

QUESTION NO: 6

An OmniScript updates data from one Salesforce record, but when it completes, only some of the data is updated in Salesforce. A DataRaptor Load saves the data. What error could cause this behavior?

Choose 2 answers


- A. The fields that are not updated are read only in Salesforce.
- B. In the DataRaptor Load, in the Preview tab, the Record is from the wrong record type.
- C. The input JSON paths In the DataRaptor Load do not match the JSON from the OmniScript.

D. ContextId is misspelled in the merge code that passes the RecordId to the DataRaptor

ANSWER: A C

QUESTION NO: 7

Refer to the exhibit below. In this Integration Procedure structure, what Send JSON Path would you use to send the output of the ActionZ element to a Response Action?

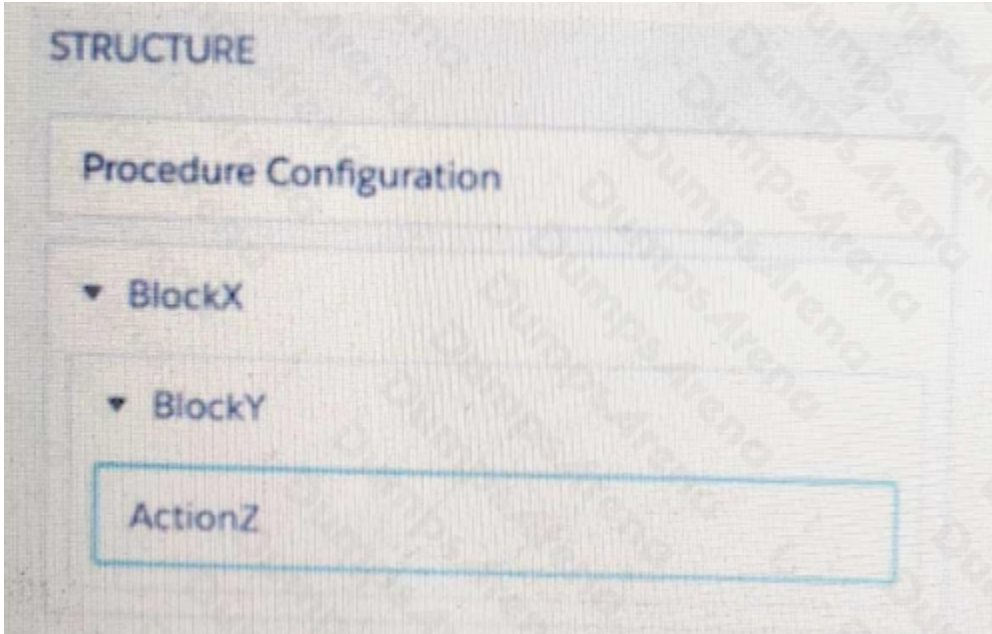

- A. BlockX.BlockYActionZ
- B. ActionZ:BlockY:BlockX
- C. ActionZ:BlockY:BlockX
- D. BlockX:BlockY:ActionAZ

ANSWER: D

QUESTION NO: 8

In an Integration Procedure, a developer needs to perform a multi-step calculation on every element of an array.

Based on best practices, what two methods are recommended?

Choose 2 answers

- A. Use a Set Values Element inside a Loop Block.
- B. Use a Decision Matrix Action to call a Decision Matrix.

- C. Use a List Action to merge the array elements together.
- D. Use an Expression Set Action to call an Expression Set.

ANSWER: A D

QUESTION NO: 9

A developer creates a DataRaptor Extract to retrieve data to pass to an external service. The external service expects the field value to be integer. However, the DataRaptor is sending it as a string.

Which action can the developer take to fix this?

- A. In the DataRaptor Output tab, select the Output Data Type of that field to Integer.
- B. In the DataRaptor Output tab, enter the default value as 0 on the field.
- C. In the DataRaptor Extract tab, set the Input Data Type field to Integer.
- D. In the DataRaptor Formula tab, define a formula using the function TOINTEGER and use the formula as output.

ANSWER: A

QUESTION NO: 10

Which two in an integration Procedure or DataRaptor can execute a function like CONCAT or DATEDIFF?

Choose 2 answers

- A. In a Set Values Action in a Value field.
- B. In a DataRaptor in an Output Tab Output JSON Path.
- C. In a DataRaptor Action in an Input Parameters value field.
- D. In a Remote Action in an Additional Output value field.

ANSWER: A D